

Standard

CONDENSATE REMOVAL PUMP

Operated by an air conditioning cooling signal, the Standard peristaltic sets the standard for reliability. The remote install options means minimum future maintenance disruption.



6.5L/h max. flow





12m max. head
(flow rate 6.5L/h)

KEY FEATURES

- AC cooling signal operated
- Remote install possible
- Pumps contaminated water
- Can run dry

SUITABILITY

- Up to 8.5kW / 29,000Btu/h
 - High wall split systems; Ducted units; Floor standing & Chassis units
- ✓ **Perfect for...** 230V Cooling unit signal operation




115mm

1.35
kg

STANDARD @ 230 VAC 50Hz

| | |
|--------------------|------------------------|
| Max. flow | 6.5L/h @ 12m head |
| Max. head | 12m |
| Max. suction lift | 3m |
| dB(A) @ 1m | 47 |
| Power supply | 230 VAC, 0.2A, 50-60Hz |
| Rated | Continuously |
| Class | I appliance |
| Max. unit output | 8.5kW / 29,000Btu/h |
| Max. water temp | 40°C / 104°F |
| Inlet/outlet | 6mm ID |
| IP Protection | IP21 |
| Safety switch | n/a |
| Thermal protection | ✓ |
| Fully potted | n/a |
| Self priming | ✓ |

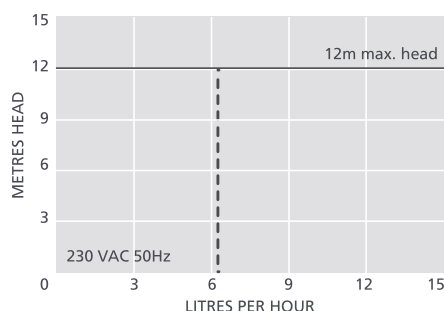

STANDARD OPTIONS

Standard FP2081/2

SUGGESTED XTRA ACCESSORIES

| Description | Part No. |
|----------------------------|----------|
| Peri Spare Tube Kit | FP1282 |
| 1 Amp Fuse | FP2620 |
| Tube To Soil Stack Adaptor | FP2038 |



For more installation accessories take a look at our Aspen Xtra range

IN THE BOX

Standard pump • 2m Plug & play power cable
• Wall mounted bracket • Fixing kit
• Install manual



Download manual at aspenpumps.com



View install video at aspenpumps.com