

## Silent<sup>+</sup> Mini Orange<sup>®</sup>

## **CONDENSATE REMOVAL PUMP**

The world's no.1 mini pump becomes the quietest in its class! Featuring an acoustic damper, anti vibration tubing & bracket, the Silent+ Mini Orange is whisper quiet.



12L/h max. flow



10m max. rec. head (flow rate 6L/h)





19dB(A) @ 1m

## **KEY FEATURES**

- Quietest in its class
- Submersible secondary reservoir included
- Plug & play


## **SUITABILITY**






✓ Perfect for... Smaller commercial and domestic units in quiet environments



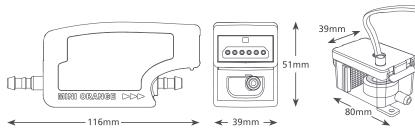



SILENT+ MINI C	DRANGE @ 230 VAC 50Hz
Max. flow	12L/h @ 0m head
Max. rec. head	10m
Max. suction lift	2m
dB(A) @ 1m	19
Power supply	230 VAC, 0.11A, 16W 50/60Hz
Rated	Non continuous
Class	II appliance 🔲
Max. unit output	16kW / 54,000Btu/h
Max. water temp	40°C / 104°F
Discharge tube	6mm ID
IP Protection	IP21
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	✓

Silent <sup>+</sup> Mini Orange	FP3313
† Pump only	
SUGGESTED XTRA ACCESSOR	RIES
Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 1/4" (6mm)	AX5100
Inline Filter 16mm	FP2640
4.3m mini/maxi orange extension kit	FP2940
For more installation accessorie a look at our Aspen Xtra range	s take

SILENT+ MINI ORANGE OPTIONS

|--|

Silent+ Mini Orange pump • 1.5m Plug & play power cable • Acoustic damper and 1m orange discharge tube with connector • Anti vibration bracket • Reservoir • Reservoir lid with 1.5m sensor cable • Submersible reservoir • Anti siphon device • Float & filter • 1.5m Suction tube 6mm ID • 220mm Orange inlet hose 14mm ID • 150mm Vinyl breather tube 6mm ID • Drain connector kit • Fixing kit • Install manual

Download manual at aspenpumps.com

View install video at aspenpumps.com

Information correct at time of going to press